

**TITAN ET-SGAP**

MODELLO	I <sub>picco</sub>	I <sub>f @ U<sub>c</sub></sub>	U <sub>n</sub> (L-PE)	U <sub>n</sub>	U <sub>c</sub>	U <sub>p</sub>	No. di poli	Resistenza di isolamento	Resistenza al corto circuito
SGAP 35	35kA	1,5 kA <sub>RMS</sub>	960V	230V (L-N / G)	250V (L-N / G)	< 4 kV	1	> 10 <sup>3</sup> Mohm	125 A gL

**TITAN ET-DR 20 kA**

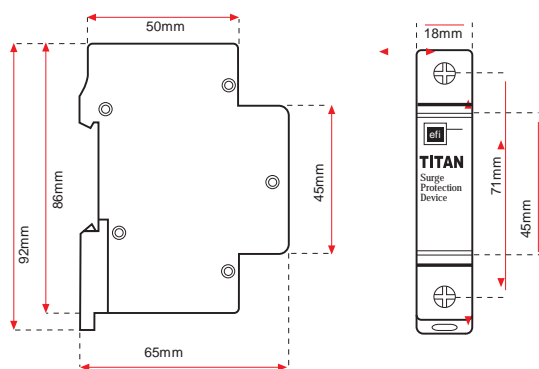
MODELLO	I <sub>max</sub>	I <sub>nom</sub>	U <sub>n</sub> (L-PE)	U <sub>n</sub>	U <sub>c</sub> MCOV	No. di poli	Tipi di protezione	Contatti ausiliari
DR1P20K230S (DC)	20kA	5kA	960V	230V	270V	1	Un tipo L-PE o N-PE	Opzionale (DC)
DR1P20K400S	20kA	5kA	1580V	400V	480V	1	Un tipo L-PE o N-PE	N/A
DR2P20K230S	20kA	5kA	960V	230V	270V	2	Tre tipi L-PE, L-N, N-PE	N/A
DR4P20K400S	20kA	5kA	960V	230V (L-N) 400V (L-L)	270V 480V	4	Sette tipi L-PE, L-N, N-PE	N/A

**TITAN ET-DR 45 kA**

MODELLO	I <sub>max</sub>	I <sub>nom</sub>	U <sub>n</sub> (L-PE)	U <sub>n</sub>	U <sub>c</sub> MCOV	No. di poli	Tipi di protezione	Contatti ausiliari
DR1P45K230S (DC)	45kA	10kA	1000V	230V	270V	1	Un tipo L-PE o N-PE	Opzionale (DC)
DR1P45K400S (DC)	45kA	10kA	2100V	400V	480V	1	Un tipo L-PE o N-PE	Opzionale (DC)
DR2P45K230S	45kA	10kA	1000V	230V	270V	2	Tre tipi L-PE, L-N, N-PE	N/A
DR4P45K400S (DC)	45kA	10kA	1000V	230V (L-N) 400V (L-L)	270V 480V	4	Sette tipi L-PE, L-N, N-PE	Opzionale (DC)

**TITAN ET-DR 80 kA**

MODELLO	I <sub>max</sub>	I <sub>nom</sub>	U <sub>n</sub> (L-PE)	U <sub>n</sub>	U <sub>c</sub> MCOV	No. di poli	Tipi di protezione	Contatti ausiliari
DR1P65K230S (DC)	* 80kA	20kA	1200V	230V	270V	1	Un tipo L-PE o N-PE	Opzionale (DC)
DR1P65K400S (DC)	* 80kA	20kA	1950V	400V	480V	1	Un tipo L-PE o N-PE	Opzionale (DC)
DR4P80K400S (DC)	80kA	20kA	1200V	230V (L-N) 400V (L-L)	270V 480V	4	Sette tipi L-PE, L-N, N-PE	Opzionale (DC)

**1 POLO**

**1 POLO PLUG-IN**
