

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 e-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex CM 20 2TT, UK  
 Phone: +44 1279 635533  
 Fax: +44 1279 635262  
 e-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 e-mail: info@jumo.us  
 Internet: www.jumo.us



# **JUMO** ecoTRANS Lf 01/02 Microprocessor Transmitter / Switching Device for Conductivity

**Type 202731**  
**Housing for DIN rail mounting**  
 (35 x 7.5 mm to EN 60 715 A.1)



## Brief description

The JUMO ecoTRANS Lf 01/02 conductivity transmitter is used to measure the conductivity of liquids in conjunction with electrolytic conductivity cells.

The instruments are designed for application in general water engineering.

The JUMO ecoTRANS Lf 01 features a freely configurable analog measurement value output. The instrument can, for example, be used as an economically priced universal transmitter.

The JUMO ecoTRANS Lf 02 is equipped with a changeover relay.


And, using the teach-in connector, the JUMO ecoTRANS Lf 02 can also automatically define the switching point of the integrated relay.

Typical areas of application are freshwater monitoring and water treatment, reverse osmosis plant, ion exchanger plant, condensate monitoring, and cooling water checks.

The instrument is programmed via the setup connection (notebook / PC), using the setup program:

- calibration of the cell constant
- calibration of the temperature coefficient
- configuration of the parameters: range, reference temperature, cell constant, temperature, switching point, analog output, and others.

## Block structure

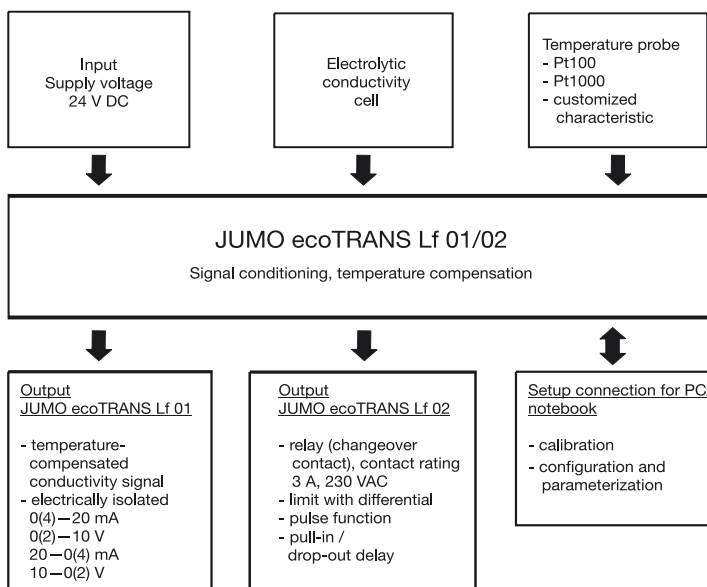

## Key features

- 3-way isolation (input, output and supply are electrically isolated from each other)
- DIN rail mounting
- 1 electrically isolated analog output 0(4) — 20 mA / 0(2) — 10 V (Type JUMO ecoTRANS Lf 01)
- 1 relay (Type JUMO ecoTRANS Lf 02)
- Teach-in function (definition of switching point through the teach-in connector) on the JUMO ecoTRANS Lf 02.
- 1 LED, two colors (red/green), for signaling operating states
- Calibration timer
- Customized characteristic for temperature probe can be implemented (e.g. NTC, PTC)
- Reference temperature is settable

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 e-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex CM 20 2TT, UK  
 Phone: +44 1279 635533  
 Fax: +44 1279 635262  
 e-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 e-mail: info@jumo.us  
 Internet: www.jumo.us



## Operation

The JUMO ecoTRANS Lf 01 is operated exclusively through the setup program using a PC. The switching point of the JUMO ecoTRANS Lf 02 can be set both through the setup program and the teach-in connector (teach-in function).

## Calibration options

### ■ Calibration of the cell constant

Subject to manufacturing tolerances, the cell constant of a conductivity cell may deviate slightly from its nominal (printed) value. In addition, the cell constant may change during operation (due to deposits or wear, for example). This results in a change of the output signal from the cell. The JUMO ecoTRANS Lf 01/02 offers the user the possibility of compensating any deviation from the nominal value of the cell constant through **manual entry** (range 20 – 500%) or **automatic calibration** of the relative cell constant  $K_{rel}$ .

### ■ Calibration of the temperature coefficient $\alpha$

The conductivity of almost all solutions depends on the temperature. To ensure correct measurement, it is therefore necessary to know both the temperature and temperature coefficient  $\alpha$  [% per °C] of the solution. The temperature can either be measured automatically with a temperature probe (Pt100 / Pt1000 / NTC / PTC) or set manually by the user.

The JUMO ecoTRANS Lf 01/02 can determine the temperature coefficient automatically, or the user can enter it manually within the range 0 – 5.5 % per °C.

## Calibration timer

If required, the integrated calibration timer will draw your attention to an intended calibration (cell constant / temperature coefficient).

## Functions of the JUMO ecoTRANS Lf 01 output

■ The instrument features an analog output for presenting the actual conductivity value.

■ The response of the measurement output to over/underrange and active measuring circuit monitoring is programmable.

On underrange or overrange, the analog output can, if required, adopt the "Low" or "High" operational state. These operational states can be recognized as "irregular" by a connected PLC.

Depending on the range,  
 "Low" is: 0 mA / 0 V /  $\leq 3.4$  mA /  $\leq 1.4$  V.

Depending on the range,  
 "High" is: 22 mA / 10.7 V

### ■ Simulation of the measurement output

The measurement output (0/2 – 10 V or 0/4 – 20 mA, depending on the setting) can be freely selected in the manual mode.

Application: "Dry-run" commissioning of the plant (without measuring cell; fault search; servicing).

## Functions of the JUMO ecoTRANS Lf 02 output

■ The instrument has a relay output (changeover contact).

■ Limit monitoring with differential. Switching function can be reversed. MAX / MIN limit comparator (limit monitor).

### ■ Teach-in function:

As soon as the teach-in connector is plugged in, the instrument determines the optimum range for the cell constant that was set and defines the switching point for the integrated relay in accordance with the actual measured value.

Limit or pulse functions can be assigned to the relay output of the JUMO ecoTRANS Lf 02.

For each one, the direction of switching (energized on going above, or going below a threshold), pull-in and / or drop-out delay, pulse function and a hysteresis can all be defined.

The response of the relay output to over/underrange and active measuring circuit monitoring is programmable (active or inactive).

## Technical data

### Inputs

#### Analog input 1 (conductivity)

Electrolytic conductivity cells with the cell constants 0.01; 0.1; 1.0; 10.0  $1/cm$  (2-electrode principle).

The cell constants can be adjusted over a range 20 – 500%.

#### Lead compensation, analog input 1

With measuring ranges above 20 mS/cm, the effect of long cables can be compensated by entering the lead resistance, within the range 0.00 to 99.99  $\Omega$ .

#### Zero-point calibration, analog input 1

Zero-point errors arising from the system can be compensated.

#### Analog input 2 (temperature)

Resistance thermometer Pt100 or Pt 1000, in 2- or 3-wire circuit, -10 to +250°C.

NTC/PTC as customized characteristic, maximum resistance 4500  $\Omega$

The setup program can be used to enter a

customized characteristic for the temperature probe. This means that any temperature probe (NTC or similar) that may already be present can continue to be used.

Measurement display (in setup program) in °C / °F

#### Lead compensation, analog input 2

The lead resistance can be compensated in software in the range 0.00 – 99.99  $\Omega$ .

This is not required if the resistance thermometer is connected in a 3-wire circuit. The offset can be used to correct the measured value within the range -20 to +20°C.

#### Measuring range

0 – 5  $\mu$ S to 0 – 200 mS, depending on the cell constant. Intermediate values are programmable.

Cell constant K	Measuring range
0.01 /cm	0 – 5 $\mu$ S/cm
0.01 /cm	0 – 20 $\mu$ S/cm
0.1 /cm	0 – 200 $\mu$ S/cm
0.1 /cm	0 – 1000 $\mu$ S/cm
1 /cm	0 – 2 mS/cm
1 /cm	0 – 20 mS/cm
10 /cm	0 – 100 mS/cm
10 /cm	0 – 200 mS/cm

#### Deviation from characteristic, conductivity

on ranges 0 – 5  $\mu$ S/cm and  
 0 – 20  $\mu$ S/cm:  $\leq 1.0\%$  of range

All other ranges:  
 $\leq 2.0\%$  of range

#### Reference temperature (for temperature compensation)

settable from 10 to 40°C  
 (factory setting: 25°C)

#### Temperature range

-10 to +250°C (also in °F)

#### Deviation from characteristic, temperature

with Pt100 / Pt1000:  $\leq 0.6\%$   
 with customized characteristic:  $\leq 5 \Omega$ .

## Outputs

### JUMO ecoTRANS Lf 01 (analog output):

freely configurable:

0(2) – 10  $V_{Rload} \geq 2$  k $\Omega$  or

10 – (2)0  $V_{Rload} \geq 2$  k $\Omega$  or

0(4) – 20  $mAR_{load} \leq 400 \Omega$  or

20 – (4)0  $mAR_{load} \leq 400 \Omega$

electrically isolated from the inputs:

$\Delta U \leq 30$  V AC or

$\Delta U \leq 50$  V DC

minimum scaling span:

10% of measuring range span.

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 e-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex CM 20 2TT, UK  
 Phone: +44 1279 635533  
 Fax: +44 1279 635262  
 e-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 e-mail: info@jumo.us  
 Internet: www.jumo.us



**Deviation from characteristic of the output signal**

≤ 0.25% ± 50 ppm per °C  
 JUMO ecoTRANS Lf 02 (relay output):  
 changeover contact  
 contact rating: 4 A, 250 V AC  
 4 A, 24 V DC  
 with resistive load  
 contact life:  
 > 100, 000 operations at rated load

**General characteristics**

**A/D converter**  
 resolution 14 bit

**Sampling time**  
 500 msec = 2 measurements per second

**Ambient temperature drift**  
 ≤ 0.5% per 10 °C

**Measuring circuit monitoring**  
 input 1 (conductivity):  
 out-of-range  
 input 2 (temperature):  
 out-of-range, probe short-circuit, probe break

In fault condition, the outputs adopt a defined (configurable) state.

**Data backup**  
 EEPROM

**Supply**  
 20 – 30V DC, ripple < 5%  
 power consumption ≤ 2 W,  
 with reverse-polarity protection.  
 For operation with SELV or PELV circuits.

**Electrical connection**  
 screw terminals up to 2.5 mm<sup>2</sup>

**Permissible ambient temperature**  
 -10 to +60°C

**Permissible storage temperature**  
 -20 to +75°C

**Climatic conditions**  
 rel. humidity ≤ 93%, no condensation

**Enclosure protection** (to EN 60 529)  
 IP20

**Electrical safety**

to EN 61 010  
 clearance and creepage distances for  
 - overvoltage category II  
 - pollution degree 2

**Electromagnetic compatibility**

to EN 61 326  
 interference immunity: to industrial  
 requirements  
 interference emission: Class B

**Housing**

housing for DIN rail mounting: PC  
 (polycarbonate)

**Mounting**

on 35 x 7.5 mm DIN rail to  
 EN 50 022


**Operating position**

unrestricted

**Weight**


approx. 110g

**Operation via the setup interface**

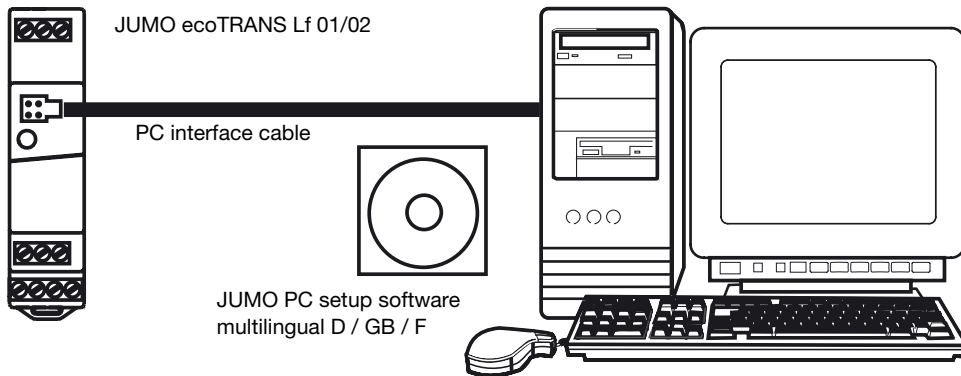


PC or notebook with  
 RS232 interface  
 Operating system:  
 - Windows '98®  
 - Windows 2000®  
 - Windows XP®  
 - Windows NT® 4.0 or  
 higher

**Dimensions**

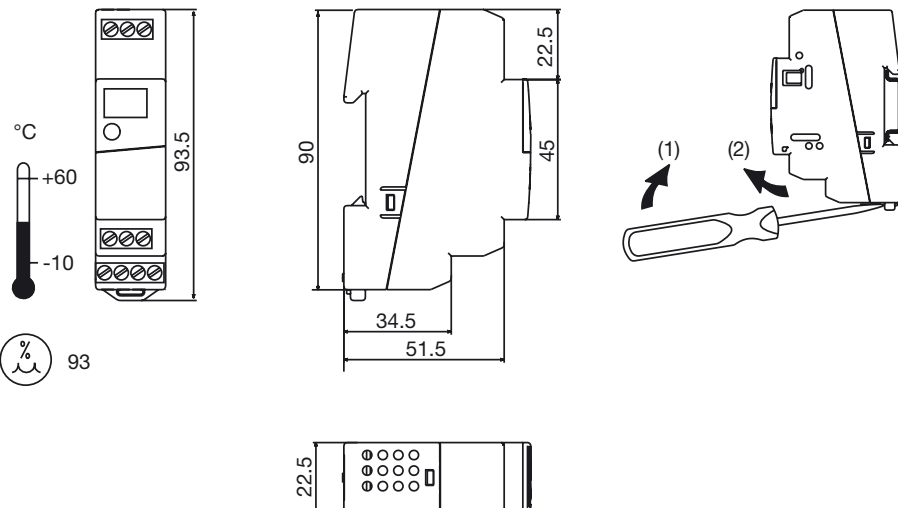



## Connection diagram

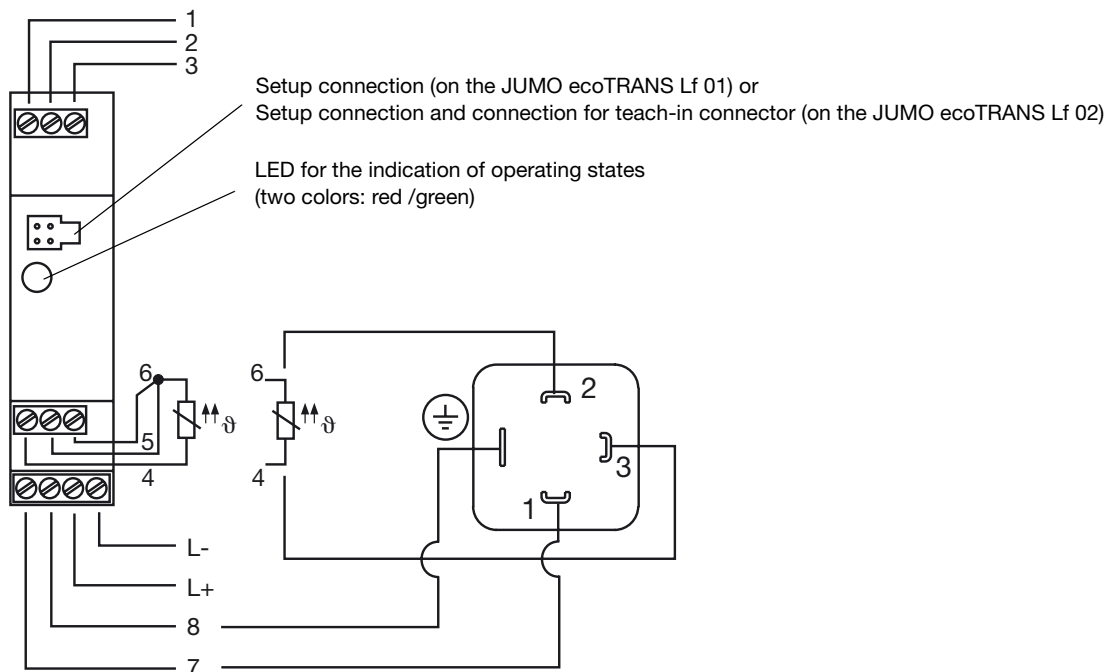

## Connection for conductivity cell

	Conductivity cell (JUMO types)			JUMO ecoTRANS Lf 01/02
	Plug-in head	Fixed cable	M12 connector	
Outer electrode		white	1	8
Inner electrode	2	brown	2	7
Temperature sensor	1	yellow	3	4*
	3	green	4	6*

\* type of connection: 2-wire

Outputs	Terminal assignments		Symbol
Analog measurement output (electrically isolated)  on the JUMO ecoTRANS Lf 01 only	1 3	+ -	
Relay  on the JUMO ecoTRANS Lf 02 only	1 2 3	n.c. (break) common n.o. (make)	

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 e-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex CM 20 2TT, UK  
 Phone: +44 1279 635533  
 Fax: +44 1279 635262  
 e-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 e-mail: info@jumo.us  
 Internet: www.jumo.us



Measurement inputs		Terminal assignments	Symbol
Conductivity cell		8 outer electrode, on coaxial cells 7 inner electrode, on coaxial cells	
Resistance thermometers in 3-wire circuit		4 5 6	
Resistance thermometers in 2-wire circuit		4 6	
Supply		Terminal assignments	Symbol
Supply		L- L +	

**Type designation:** JUMO ecoTRANS Lf01 /02  
 Programmable transmitter / switching device for electrolytic conductivity  
 using the 2-electrode procedure

(1) Basic type

202731 JUMO ecoTRANS Lf 01/02

(2) Basic type extension

- 01 version with transmitter (analog output only)
- 02 switching device version (relay output only)

(3) Measurement range

- 015 range preset to 0 – 2 mS/cm  
K=1.0; ATC with Pt100
- 016 range preset to 0 – 20 mS/cm  
K=1.0; ATC with Pt100

(4) Extra codes

- 000 none
- 024 including PC setup software

	(1)		(2)		(3)		(4)
Order code	202731	/		-		/	
Order example	202731	/	01	-	015	/	000

**JUMO GmbH & Co. KG**

Delivery address: Mackenrodtstraße 14,  
36039 Fulda, Germany  
Postal address: 36035 Fulda, Germany  
Phone: +49 661 6003-0  
Fax: +49 661 6003-607  
e-mail: mail@jumo.net  
Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**

JUMO House  
Temple Bank, Riverway  
Harlow, Essex CM 20 2TT, UK  
Phone: +44 1279 635533  
Fax: +44 1279 635262  
e-mail: sales@jumo.co.uk  
Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**

8 Technology Boulevard  
Canastota, NY 13032, USA  
Phone: 315-697-JUMO  
1-800-554-JUMO  
Fax: 315-697-5867  
e-mail: info@jumo.us  
Internet: www.jumo.us

**Stock items** (shipment: 3 working days after receipt of order)

	<b>Sales No.</b>
JUMO ecoTRANS Lf 01 (with analog output), type 202731/01-015/000 Preset range: 0 – 2mS / cm; K = 1.0 1 / cm	20/00421026
JUMO ecoTRANS Lf 01 (with analog output), type 202731/01-015/024, including PC setup software (bundle) Preset range: 0 – 2mS / cm; K = 1.0 1 / cm	20/00421035
JUMO ecoTRANS Lf 02 (with relay output), type 202731/02-016/000, including teach-in connector Preset range: 0 – 20mS / cm; K = 1.0 1 / cm	20/00421032
JUMO ecoTRANS Lf 02 (with relay output), type 202731/02-015/024, including teach-in connector and PC setup software (bundle) Preset range: 0 – 2mS / cm; K = 1.0 1 / cm	20/00421049

**Accessories** (available from stock)

<b>Designation</b>	<b>Sales No.</b>
PC setup software for JUMO ecoTRANS Lf 01 / 02	20/00432577
PC interface cable with TTL / RS232 converter and adapter (serial connection cable)	70/00350260
PC interface cable with USB / TTL converter and two adapters (USB connection cable)	70/00456352
Conductivity simulator (see data sheet 20.1090)	20/00300478
Connection cable for conductivity simulator (DIN connector/bare cable ends)	20/00082901

For suitable conductivity cells, please see our data sheets 20.2922, 20.2923, 20.2924 and 20.2925.

**Note:** All stock items can be freely programmed through the PC setup program. The only differences between them are varying presettings with regard to the measurement range and cell constant.

The following presettings are common to all stock versions: automatic temperature compensation with Pt100 (ATC), 4 – 20 mA output (Lf 01) or switching point set to max. range (Lf 02), temperature coefficient  $\alpha = 2.2 \text{ \%}/^{\circ}\text{C}$ .

It is **not** possible to switch over from type ecoTRANS Lf 01 to type ecoTRANS Lf 02 or vice versa.