

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Thermostats for panel mounting ETH Series

Version approved to DIN 3440
and Pressure Equipment Directive 97/23/EC

Brief description

ETH panel-mounting thermostats monitor thermal processes. The instruments can be supplied as safety temperature monitors STW (STB) and safety temperature limiters STB. In the event of a fault, the STB sets the system being monitored to a safe operational state.

Panel-mounting thermostats operate on the principle of fluid expansion, with a microswitch serving as the electrical switching element.

Switching action

Safety temperature monitor STW

If the temperature at the probe exceeds the set limit, the circuit is opened by a snap-action switch. If the temperature falls below the set limit (by the switching differential), the switch returns to its initial position.

Lock-out facility on the safety temperature limiter STB

If the temperature at the probe exceeds the set limit, the circuit is opened and the microswitch is locked out mechanically.

After the temperature has fallen by about 10 % of span below the safe temperature limit (approx. 15% for limit setting > +350°C), the microswitch can be reset manually.

Use of the safety temperature monitor STW as safety temperature limiter STB

The circuitry to which the thermostat is connected must comply with DIN 3440 and VDE 0116.

Self-monitoring on the safety temperature limiter STB and the safety temperature monitor STW (STB)

Failure of the measuring system, i.e. a leakage of the expansion fluid, will cause the pressure under the diaphragm to drop, thus permanently opening the circuit. Resetting is no longer possible.

If the temperature at the probe cools down to below -20°C approx., the circuit will also be opened. As the temperature rises to above -20°C approx., the STB has to be reset manually. On the STW (STB), the reset is performed automatically.



You will find the Declarations of Conformity at:
 www.jumo.net
 ⇒ Products
 ⇒ Data Sheet 60.2010
 or
 ask for them to be sent.

Types and approvals

Type	Switching action	DIN Reg. No.	Tests	Important note
ETH-20 ETH-70	STW (STB) STB	STW (STB) 79903S STB 80003	Pressure Equipment Directive 97/23/EC CE0036	The DIN Registration No. becomes invalid if pockets are used that are not listed in our Data Sheet 60.6710.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Technical data

Control ranges and temperature probes

Type	Control/ limit setting ranges in °C	Max. permissible probe temperature in °C	Maximum capillary length in mm	Probe length "L" in mm	
				Probe dia. "d" in mm, dia. "6" = standard	
				6	8
liquid-filled					
ETHf-20	+30 to +110	135	5000	108	75
ETHf-70	+60 to +130	150		116	79
	+20 to +150	175		77	60
	+50 to +250	290		64	49
	+50 to +300	345		55	---
gas-filled					
ETHf-20	+20 to +400	460	1000	176	106
ETHf-70	+20 to +500	550	2000	127	81
	+20 to +500	550	4000	202	119

Capillary and temperature probe

Type	End of scale	Capillary	Temperature probe	Note
ETHf-...	up to 200°C	copper (Cu) 1.5 mm dia. Mat. Ref. 2.0090	copper (Cu) Mat. Ref. 2.0090 brazed	-
	up to 350°C	copper (Cu) 1.5 mm dia. Mat. Ref. 2.0090	stainless steel (CrNi) Mat. Ref. 1.4571 brazed	-
	up to 500°C	stainless steel (CrNi) 1.5 mm dia. Mat. Ref. 1.4571	stainless steel (CrNi) Mat. Ref. 1.4571 welded	-
	up to 350°C	stainless steel (CrNi) 1.5 mm dia. Mat. Ref. 1.4571	stainless steel (CrNi) Mat. Ref. 1.4571 welded	at extra cost
Capillary length	standard 1000 mm, max. 5000 mm			
Min. bending radius of capillary	5 mm			

Electrical data

Switching element	ETHf-20	ETHf-70	ETHf-70/U
	microswitch with changeover contact	microswitch with break contact and lock-out	microswitch with break contact, lock-out and additional signal contact
Max. current rating	10 (2) A, 230 V AC +10%, p.f. = 1 (0.6) 0.25 A, 230 V DC +10%		
	with differential 2% 6 (1.2) A, 230 V AC +10%, p.f. = 1 (0.6)	-	-
	gold-plated microswitch, code /au 0.1 A, 24 V AC / DC contact resistance 2.5 – 10 mΩ		-

Operating data

Switching differential in % of control / limit setting range	Switching action	with liquid-filled measuring system		
		Nominal value	Possible actual value	
	STW (STB)	5	4 max. 6	standard
		9	8 max. 11	on request
		2	1 max. 3	at extra cost
		with gas-filled measuring system		
		7	5 max. 12	standard
		9	8 max. 16	on request
		2	1.5 max. 3	at extra cost
Switching point accuracy in % of limit setting range	in upper third of scale +0/-5%, at start of scale +0/-10%			

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Ambient temperature error referred to control / limit setting range	A deviation of the ambient temperature at the thermostat head from the 22°C calibration ambient temperature produces a shift of the switching point: higher ambient temperature = lower switching point lower ambient temperature = higher switching point		
	Panel-mounting thermostats with end of scale		
	< 200°C	≥ 200°C ≤ 350°C	> 350°C ≤ 500°C
	due to thermostat head, % per °C		
	0.17	0.13	0.12
Permissible storage temperature	due to capillary, % per °C per m length		
	0.054	0.11	0.03
Permissible storage temperature	-50 to +50°C		

Permissible ambient temp. in operation	+80°C max.
Nom. position (NL)	unrestricted

Thermostat head

Chassis material	zinc-plated steel
Fixing	2 screws M 3, 22 mm spacing
Scale span	250° ↯
Electr. connection	screw terminals up to 2.5 mm ² conductor cross-section
Limit setting	The limit can be adjusted at the setpoint spindle prior to mounting, by using a screwdriver.

Protection	EN 60 529-IP00
Weight	approx. 0.2 kg

Process connection¹

ETH- Series with capillary	plain cylindrical probe A (standard)
	pocket U (on request) screw-in pocket with screw-in spigot G 1/2 Form A to DIN 3852/2 and clamping clip with fixing screw for securing the probe
Material	up to +150°C: CuZn (nickel-plated) as standard above +150°C: St as standard (CrNi on request)
Fitting length S	standard lengths: 100, 120, 150, 200 or 300 mm (other lengths on request)
Immersion tube dia.	D = 8 mm

¹ See data sheet 60.6710 for additional process connections and pockets.

Note

Physical and toxicological properties of the expansion fluid which may escape in the event of a system fracture.

Control range with end of scale °C	Dangerous reactions	Fire and explosion hazard		Water contamination	irritant	Toxicological data	
		Ignition temp. °C	Explosion limit % v/v			danger to health	toxic
< +200	no	+ 355	0.6 – 8	yes	yes	1	no
≥ 200°C ≤ +350	no	+ 490	- -	yes	yes	1	no
> 350°C ≤ +500	no	no	no	no	no	no	no

¹ At present there is no restrictive statement from the health authorities concerning any danger to health over short periods and at low concentrations, e.g. after a fracture of the measuring system.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net





JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us




Dimensions

ETHf-70, with plain cylindrical probe A, no pocket

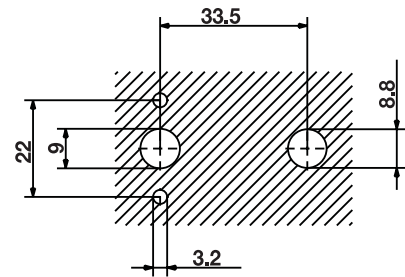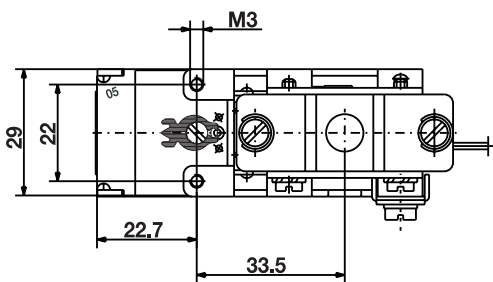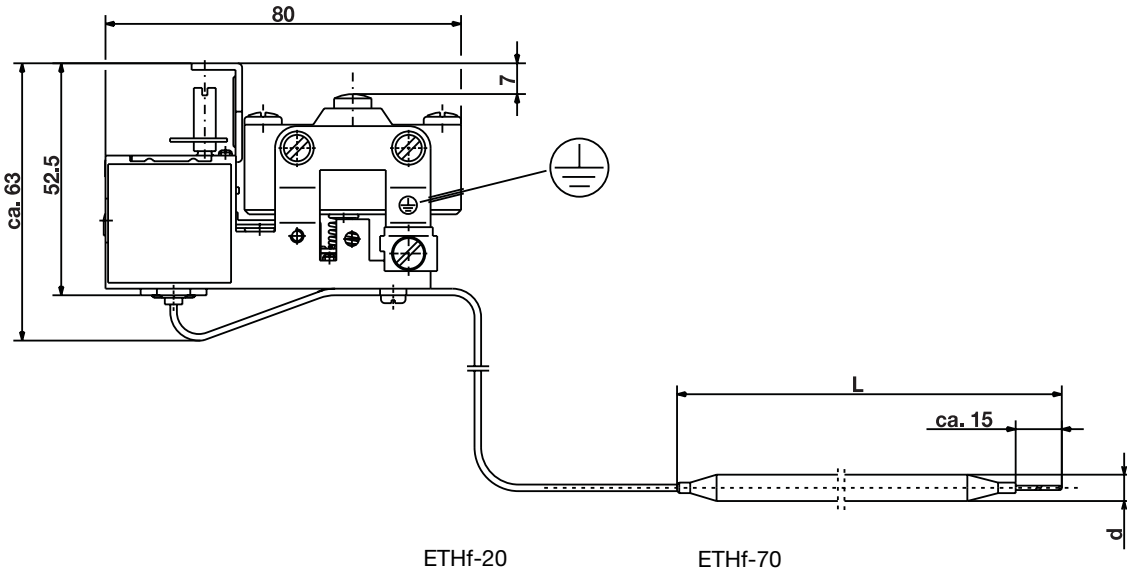


Connection diagrams


ETHf-20
with changeover contact



ETHf-70
with break contact and lock-out



ETHf-70
with break contact, lock-out and additional signal contact



JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net



JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Order details

ETH Series

Order code	(1) Basic type
602010	Panel-mounting thermostat, ETH Series
	(2) Basic type extensions
20	ETH-20 Safety temperature monitor STW with capillary
70	ETH-70 Safety temperature limiter STB with capillary
	(3) Control/limit ranges
052	+30 to +110
066	+60 to +130
043	+20 to +150
063	+50 to +250
064	+50 to +300
045	+20 to +400
046	+20 to +500
	(4) Switching differential
00	no differential (ETHf-70 STB)
20	2% of scale span
50	5% of scale span
70	7% of scale span
90	9% of scale span
	(5) Capillary length
1000	1000 mm
2000	2000 mm
3000	3000 mm
4000	4000 mm
5000	5000 mm
...	(special length, details in plain text)
	(6) Material of capillary
40	Cu(copper)
20	CrNi(stainless steel 1.4571)
	(7) Process connection¹
10	A = plain cylindrical probe 
20	U = screw-in pocket 
	(8) Thread for process connection¹
00	no thread (process connection A)
13	external thread G 1/2
	(9) Material of process connection
00	with process connection A only
46	CuZn (brass)
01	St (steel)
20	CrNi (stainless steel 1.4571)
	(10) Fitting length S (immersion tube length)
000	no pocket
100	100mm
120	120mm
150	150mm
200	200mm
300	300mm
...	... special length, details in plain text

...continued on next page

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Order details

ETH Series

Order code	(11) Diameter D (immersion tube dia.)
00	no pocket
8	8 mm
10	10 mm
(12) Diameter d (probe dia.)	
6	6 mm
8	8 mm
(13) Extra codes ²	
000	no extra code
574	U STB with (n.c.) break contact, lock-out and additional signal contact
702	au snap-action switch, gold-plated

Order code	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)												
602010	/	..	-	...	-	..	-	-	..	-	..	-	..	-	...	/	...	, ...						
Order example	602010	/	70	-	052	-	00	-	1000	-	40	-	10	-	00	-	00	-	000	-	00	-	8	/	702 ²

¹ See data sheet 60.6710 for other probe mountings and pockets.

² List extra codes in sequence, separated by commas.