


TEAM CONTROL UR

AWM Style 21179 (90°C / 1000V)

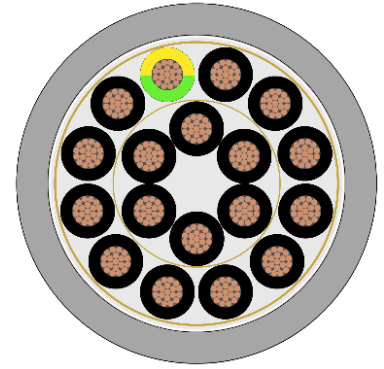

Conductor

Flexible red copper IEC 60228 Cl.5
Acc.to CEI 20-29, DIN VDE 0295

Color Conductor

Black cores with consecutive numbers + yellow green

Total Shield

No

Nominal Voltage

UL 1000 V

Temperature

Fix -40° +90°
Mobile -5° +90°

Style

UL AWM Style 21179
Csa AWM I/II and A/B

Flame Test

Test method B according to DIN VDE 0472 part 804
IEC 60332-1
Acc.to IEC 60332-3-24
UL VW1 and CSA FT1

Insulation

Special PVC Acc. To UL1581

Wrapping

PETP Foil

Jacket

Special PVC Acc. To UL1581
Color Grey RAL 7001

Test Voltage

4000 V

Bending Radius

Fix 4 x D
Mobile 15 x D

Oil Resistance

DIN EN 50290-2-22
Resp. VDE 0819-102, TM54



Name	Cable Type	Ø mm	Weight Kg
FIX2X0,50UR	2 x 0,5	5,8	46,5
FIX3G0,50UR	3 x 0,5	6,2	55,5
FIX4G0,50UR	4 x 0,5	6,9	69,7
FIX5G0,50UR	5 x 0,5	7,5	83,3
FIX7G0,50UR	7 x 0,5	8,4	107,0
FIX12G0,50UR	12 x 0,5	10,9	181,0
FIX18G0,50UR	18 x 0,5	13,2	266,8
FIX25G0,50UR	25 x 0,5	15,2	357,6
FIX2X0,75UR	2 x 0,75	6,2	55,5
FIX3G0,75UR	3 x 0,75	6,6	66,7
FIX4G0,75UR	4 x 0,75	7,4	85,0
FIX5G0,75UR	5 x 0,75	8,3	106,8
FIX7G0,75UR	7 x 0,75	9,0	131,3
FIX12G0,75UR	12 x 0,75	11,9	228,3
FIX18G0,75UR	18 x 0,75	14,3	333,2
FIX25G0,75UR	25 x 0,75	16,6	452,8
FIX2X1UR	2 x 1	6,5	63,4
FIX3G1UR	3 x 1	7,1	79,9
FIX4G1UR	4 x 1	7,7	97,2
FIX5G1UR	5 x 1	8,7	123,3
FIX7G1UR	7 x 1	9,4	151,9
FIX12G1UR	12 x 1	12,8	275,0
FIX18G1UR	18 x 1	15,1	391,7
FIX25G1UR	25 x 1	17,6	535,8
FIX34G1UR	34 x 1	20,9	747,0
FIX41G1UR	41 x 1	22,8	892,7
FIX50G1UR	50 x 1	24,8	1.066,3
FIX61G1UR	61 x 1	24,8	1.141,6
FIX2X1,5UR	2 x 1,5	7,3	83,7
FIX3G1,5UR	3 x 1,5	7,7	101,2
FIX4G1,5UR	4 x 1,5	8,6	128,9



FIX5G1,5UR	5 x 1,5	9,5	158,6
FIX7G1,5UR	7 x 1,5	10,5	203,1
FIX12G1,5UR	12 x 1,5	14,2	363,0
FIX18G1,5UR	18 x 1,5	16,7	516,8
FIX25G1,5UR	25 x 1,5	19,6	714,0
FIX2X2,5UR	2 x 2,5	8,5	120,1
FIX3G2,5UR	3 x 2,5	9,0	147,8
FIX4G2,5UR	4 x 2,5	10,0	187,7
FIX5G2,5UR	5 x 2,5	11,2	235,2
FIX7G2,5UR	7 x 2,5	12,2	297,7
FIX12G2,5UR	12 x 2,5	16,4	526,6
FIX18G2,5UR	18 x 2,5	19,6	767,2
FIX25G2,5UR	25 x 2,5	23,0	1.060,1
FIX2X4UR	2 x 4	9,9	171,2
FIX3G4UR	3 x 4	10,6	216,0
FIX4G4UR	4 x 4	11,8	275,5
FIX5G4UR	5 x 4	13,1	341,5
FIX7G4UR	7 x 4	14,5	442,8
FIX12G4UR	12 x 4	19,4	777,8
FIX2X6UR	2 x 6	11,2	231,4
FIX3G6UR	3 x 6	11,9	292,2
FIX4G6UR	4 x 6	13,3	375,6
FIX5G6UR	5 x 6	14,8	467,1
FIX7G6UR	7 x 6	16,4	609,5
FIX2X10UR	2 x 10	14,2	376,5
FIX3G10UR	3 x 10	15,1	477,2
FIX4G10UR	4 x 10	16,7	606,6
FIX5G10UR	5 x 10	18,9	768,4
FIX7G10UR	7 x 10	20,8	996,3
FIX3G16UR	3 x 16	19,5	783,5
FIX4G16UR	4 x 16	21,8	1.007,3
FIX5G16UR	5 x 16	24,5	1.266,5



FIX7G16UR	7 x 16	27,2	1.654,7
FIX4G25UR	4 x 25	26,0	1.493,8
FIX5G25UR	5 x 25	29,1	1.869,4
FIX7G25UR	7 x 25	32,2	2.442,1
FIX4G35UR	4 x 35	29,2	1.977,8
FIX5G35UR	5 x 35	32,7	2.476,4
FIX4G50UR	4 x 50	35,9	2.907,2
FIX4G70UR	4 x 70	41,5	3.971,1
FIX4G95UR	4 x 95	45,0	5.078,9
FIX4G120UR	4 x 120	47,6	5.975,1
FIX4G150UR	4 x 150	54,0	7.584,5
FIX4G185UR	4 x 185	58,3	9.065,9

