


TEAM POWER 2YSLCYK-J

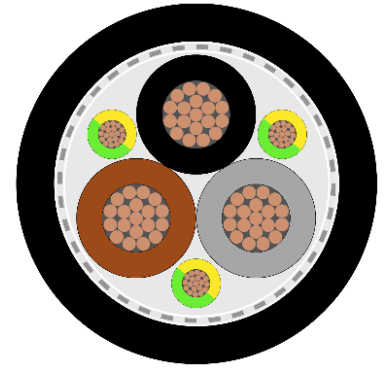

Conductor

Flexible red copper IEC 60225 Cl.5
Acc.to CEI 20-29, DIN VDE 0295

Color Conductor

Colour code according to DIN VDE 0293-308

Jacket

PVC TM2 Acc.To CEI 20-11 and VDE 0207
Color Black RAL 9005

Test Voltage

4000 V

Bending Radius

Fix 12mm 5 x D
Fix 12-20mm 7,5 x D
Fix 20mm 10 x D
Free Movement 12mm 10 x D
Free Movement 12-20mm 15 x D
Free Movement 20mm 20 x D

Flame Test

Acc. To DIN VDE 0482-332-1
Acc.to IEC 60332-1-2

Insulation

Polietilene PE

Total Shield

Alu Foil + Tinned copper braid coverage 85%

Nominal Voltage

600/1000 V

Temperature

Fix -40° +80°
Mobile -5° +70°

Oil Resistane

EN 60811-404

UV Resistant & Outdoor Use

Yes



Name	Cable Type	Ø mm	Weight Kg
2Y3X1,5+3G0,25	3 x 1,5 + 3 x 0,25	10,2	140,0
2Y3X2,5+3G0,50	3 x 2,5 + 3 x 0,5	11,4	220,0
2Y3X4+3G0,75	3 x 4 + 3 x 0,75	13,1	323,0
2Y3X6+3G1	3 x 6 + 3 x 1	14,9	420,0
2Y3X10+3G1,5	3 x 10 + 3 x 1,5	18,4	615,0
2Y3X16+3X2,5	3 x 16 + 3 x 2,5	21,6	819,0
2Y3X25+3G4	3 x 25 + 3 x 4	25,3	1.402,0
2Y3X35+3G6	3 x 35 + 3 x 6	27,8	1.718,0
2Y3X50+3G10	3 x 50 + 3 x 10	32,6	2.399,0
2Y3X70+3G10	3 x 70 + 3 x 10	38,9	3.173,0
2Y3X95+3G16	3 x 95 + 3 x 16	44,3	4.162,0
2Y3X120+3G16	3 x 120 + 3 x 16	46,8	5.253,0
2Y3X150+3G25	3 x 150 + 3 x 25	53,5	6.128,0
2Y3X185+3G35	3 x 185 + 3 x 35	59,5	7.450,0
2Y3X240+3G50	3 x 240 + 3 x 50	70,0	10.800,0
2Y3X300+3G70	3 x 300 + 3 x 70	74,0	13.760,0
2Y4G1,5	4 x 1,5	10,4	154,0
2Y4G2,5	4 x 2,5	12,3	229,0
2Y4G4	4 x 4	14,5	339,0
2Y4G6	4 x 6	16,8	451,0
2Y4G10	4 x 10	19,7	667,0
2Y4G16	4 x 16	22,0	892,0
2Y4G25	4 x 25	27,0	1.440,0
2Y4G35	4 x 35	30,3	1.861,0
2Y4G50	4 x 50	35,0	2.547,0
2Y4G70	4 x 70	39,4	3.404,0
2Y4G95	4 x 95	46,0	4.888,0
2Y4G120	4 x 120	51,4	5.703,0
2Y4G150	4 x 150	58,8	7.040,0
2Y4G185	4 x 185	61,1	9.150,0
2Y4G240	4 x 240	70,0	12.500,0

