

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
e-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.
JUMO House
Temple Bank, Riverway
Harlow, Essex CM 20 2TT, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
e-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
8 Technology Boulevard
Canastota, NY 13031, USA
Phone: 315-697-JUMO
1-800-554-JUMO
Fax: 315-697-5867
e-mail: info@jumo.us
Internet: www.jumo.us



JUMO FOODtemp Insertion resistance thermometers


- for temperatures from -50 to +260°C
- steam-tight and pressure-proof
- high mechanical strength
- for use in the food industry
- with several measurement points

Thanks to their special construction, the rugged steam-tight insertion resistance thermometers are particularly suitable for cooking and baking processes in all areas of food processing and preservation. Other applications are autoclaves and sterilizers.

The stainless steel probe tube is available with concentric point or oblique tip (approx. 25° or 45°).

All versions are highly resistant to shock and vibration. The handles are resistant to oil and acid.

The measuring insert is normally fitted with a Pt100 temperature sensor to EN 60 751, Class B in 2-wire or 3-wire circuit.



Technical data

Connection

Connecting cable

Handle

Protection tube

Protection tube end

Measuring insert

Protection

cable ends available as: bare wires, with ferrules, receptacles or multipole connector

silicone, ambient temperature -50 to +180°C

PTFE, ambient temperature -50 to +260°C

connecting cable available with shielding (option)

PPS plastic handle, ambient temperature +200°C max.

silicone handle, ambient temperature +200°C max.

PTFE handle, ambient temperature +260°C max.

FPM handle, ambient temperature +200°C max.

PEEK handle, ambient temperature +260°C max.

stainless steel 1.4571, 3.2mm, 4mm and 4.5mm dia.

concentric, angled at approx. 25°

oblique, angled at 45°

Pt100 temperature sensor, EN 60 751, Cl. B, 2-wire circuit

IP67


JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13031, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us




Dimensions

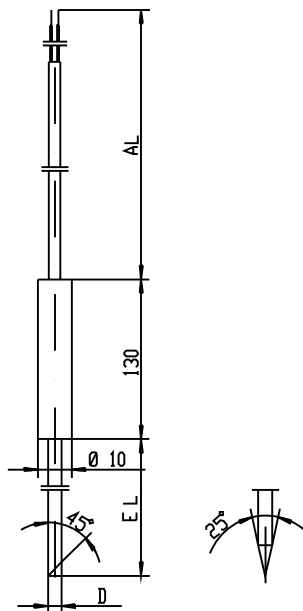


Type 902305/22

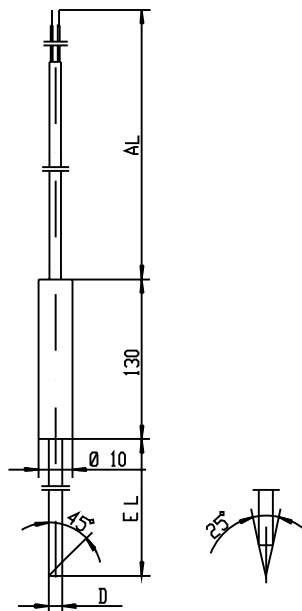


Type 902305/23

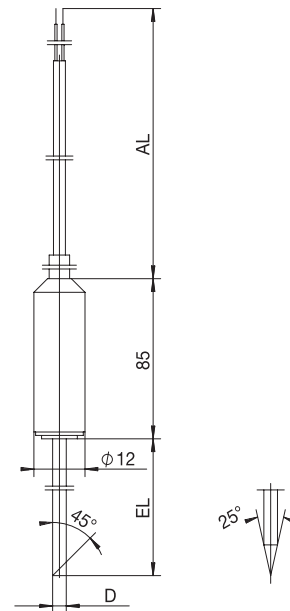


Type 902305/33

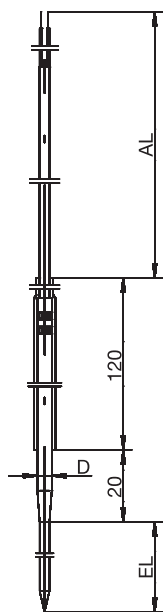

Type 902305/37
 Type 902305/38

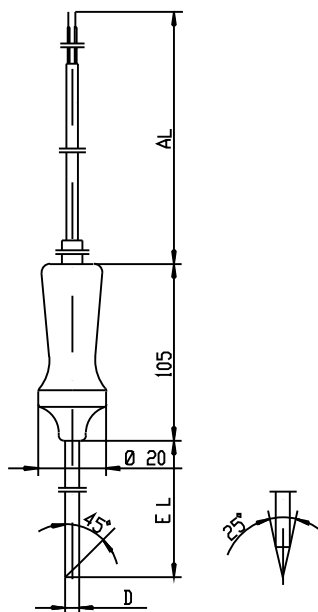

Type 902305/43

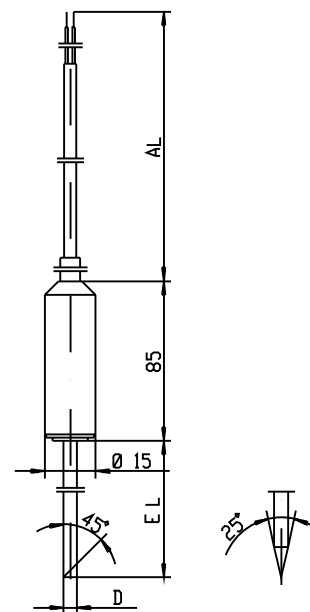


Type 902305/52


JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13031, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us

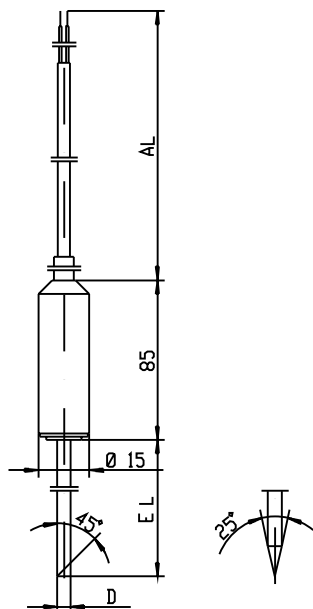

Type 902305/63

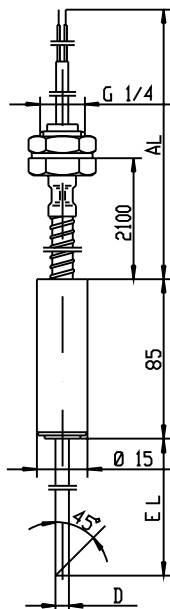

Type 902305/74

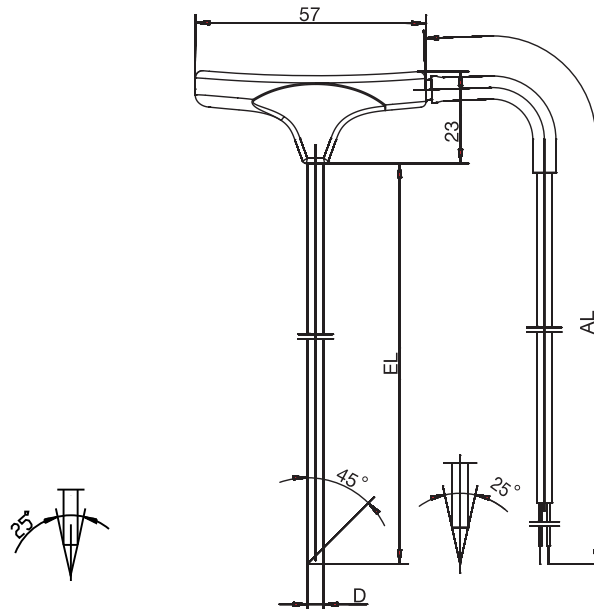

Type 902305/82
 Type 902305/83

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13031, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Order details: Insertion resistance thermometers

(1) Basic version

	902305/22	Insertion resistance thermometer with silicone handle 10 mm dia. and silicone cable		
	902305/23	Insertion resistance thermometer with silicone handle 10 mm dia. and PTFE cable		
	902305/33	Insertion resistance thermometer with PTFE handle 12 mm dia. and PTFE cable		
	(2) Operating temperature in °C			
x	x	x	380	-50 to +200°C
			386	-50 to +260°C
	(3) Measuring insert			
x	x	x	1001	1 x Pt100 in 3-wire circuit
x	x	x	1003	1 x Pt100 in 2-wire circuit
x	x	x	1011	1 x Pt100 in 4-wire circuit
x	x	x	2001	2 x Pt100 in 3-wire circuit
x	x	x	2003	2 x Pt100 in 2-wire circuit
	(4) Tolerance class to EN 60 751			
x	x	x	1	Class B (standard)
x	x	x	2	Class A
	(5) Protection tube diameter D in mm			
x	x	x	4	4mm
x	x	x	4.5	4.5mm (only with 2 x Pt100 in 3-wire circuit)
	(6) Fitting length EL in mm			
x	x	x	100	100mm
x	x	x	150	150mm
x	x	x	200	200mm
	(7) Insertion tip			
x	x	x	2	concentric, angled at 25°
x	x	x	3	oblique, angled at 45°
	(8) Connecting cable end			
x	x	x	03	bare cable ends
x	x	x	11	ferrules to DIN 46 228 Part 4 (standard)
x	x	x	13	receptacle 6.3 to DIN 46 247
x	x	x	80	multipole connector (please specify type in plain text)
	(9) Connecting cable length AL in mm (500 ≤ AL ≤ 500000)			
x	x	x	4000	4000mm (standard)
x	x	x	...	please specify in plain text (500mm steps)
	(10) Extra codes			
x	x	x	000	no extra code
x	x	x	317	shielded connecting cable

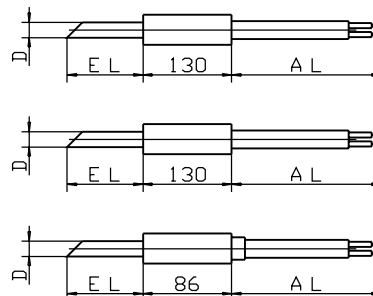

Order code (1) - (2) - (3) - (4) - (5) - (6) - (7) - (8) - (9) / (10)
 Order example 902305/22 - 380 - 1003 - 1 - 4 - 100 - 3 - 11 - 4000 / 000

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13031, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Order details: Insertion resistance thermometers

(1) Basic version

	902305/37	Miniature insertion resistance thermometer with FPM handle 6.5mm dia. and silicone cable
	902305/38	Miniature insertion resistance thermometer with FPM handle 6.5mm dia. and shielded PTFE cable
x	x	(2) Operating temperature in °C 380 -50 to +200°C
	x	(3) Measuring insert 1001 1 x Pt100 in 3-wire circuit
x	x	1003 1 x Pt100 in 2-wire circuit
	x	1011 1 x Pt100 in 4-wire circuit
x	x	(4) Tolerance class to EN 60 751 1 Class B (standard)
x	x	2 Class A
x	x	(5) Protection tube diameter D in mm 4 4mm stepped down to 2.5mm
x	x	(6) Fitting length EL in mm 30 30mm
x	x	50 50mm
x	x	80 80mm
x	x	100 100mm
x	x	(7) Connecting cable end 03 bare cable ends
x	x	11 ferrules to DIN 46 228 Part 4 (standard)
x	x	13 fast-on connector 6.3 to DIN 46 249
x	x	80 multipole connector (please specify type in plain text)
x	x	(8) Connecting cable length AL in mm (500 ≤ AL ≤ 500000) 4000 4000mm (standard)
x	x	... please specify in plain text (500mm steps)

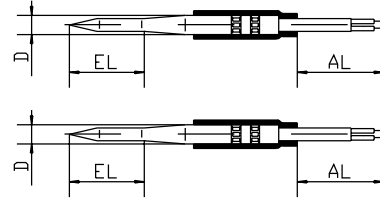

Order code - - - - - - -
 Order example 902305/37 - 380 - 1003 - 1 - 4 - 80 - 11 - 4000

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13031, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Order details: Insertion resistance thermometers

(1) Basic version

	902305/43	Insertion resistance thermometer with PPS plastic handle 20mm dia. and PTFE cable
	902305/52	Insertion resistance thermometer with PTFE handle 15mm dia. and silicone cable
	902305/63	Insertion resistance thermometer with PTFE handle 15mm dia. and PTFE cable
	902305/74	Insertion resistance thermometer with PTFE handle 15mm dia. and stainless steel corrugated tube
	(2) Operating temperature in °C	
x	x	380 -50 to +200°C
	x	386 -50 to +260°C
	(3) Measuring insert	
x	x	1001 1 x Pt100 in 3-wire circuit
x	x	1003 1 x Pt100 in 2-wire circuit
x	x	1011 1 x Pt100 in 4-wire circuit
x	x	2001 2 x Pt100 in 3-wire circuit
	x	2003 2 x Pt100 in 2-wire circuit
	(4) Tolerance class to EN 60 751	
x	x	1 Class B (standard)
x	x	2 Class A
	(5) Protection tube diameter D in mm	
	x	3.2 3.2mm dia. (only with 1 x Pt100 in 2-wire circuit)
x	x	4 4mm
	x	4.5 4.5mm (only with 2 x Pt100 in 3-wire circuit)
	(6) Fitting length EL in mm	
x	x	100 100mm
x	x	150 150mm
	x	200 200mm
	(7) Insertion tip	
x	x	2 concentric, angled at 25°
x	x	3 oblique, angled at 45°
	(8) Connecting cable end	
x	x	03 bare cable ends
x	x	11 ferrules to DIN 46 228 Part 4 (standard)
x	x	13 receptacle 6.3 to DIN 46 247
x	x	80 multipole connector (please specify type in plain text)
	(9) Connecting cable length AL in mm (500 ≤ AL ≤ 500000)	
x	x	4000 4000mm (standard)
x	x	... please specify in plain text (500mm steps)
	(10) Extra codes	
x	x	000 no extra code
x	x	317 shielded connecting cable

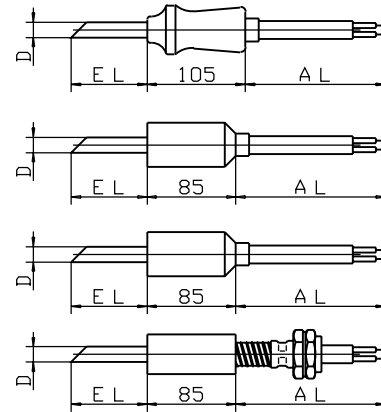

Order code

Order example

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
902305/43	- 380	- 1003	- 1	- 4	- 100	- 3	- 11	- 4000	/ 000

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13031, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Order details: Insertion resistance thermometers

(1) Basic version

	902305/82	Insertion resistance thermometer with PEEK handle and silicone cable
	902305/83	Insertion resistance thermometer with PEEK handle and PTFE cable
	(2) Operating temperature in °C	
x	380	-50 to +200°C
x	386	-50 to +260°C
	(3) Measuring insert	
x x	1001	1 x Pt100 in 3-wire circuit
x x	1003	1 x Pt100 in 2-wire circuit
x	1011	1 x Pt100 in 4-wire circuit
x	2001	2 x Pt100 in 3-wire circuit (only PTFE cable with diameter D = 4.5mm)
x	2003	2 x Pt100 in 2-wire circuit
	(4) Tolerance class to EN 60 751	
x x	1	Class B (standard)
x x	2	Class A
	(5) Protection tube diameter D in mm	
x	4	4mm dia.
x	4.5	4.5mm
	(6) Fitting length EL in mm	
x x	100	100mm (standard)
x x	150	150mm
	(7) Insertion tip	
x x	2	concentric, angled at 25° (approx.)
x x	3	oblique, angled at 45° (standard)
	(8) Connecting cable end	
x x	03	bare cable ends
x x	11	ferrules to DIN 46 228 Part 4 (standard)
x x	13	receptacle 6.3 to DIN 46 247
x x	80	multipole connector (please specify type in plain text)
	(9) Connecting cable length AL in mm (500 ≤ AL ≤ 500000)	
x x	4000	4000mm (standard)
x x	...	please specify in plain text (500mm steps)
	(10) Extra codes	
x x	000	no extra code
x	317	shielded connecting cable



Order code (1) (2) (3) (4) (5) (6) (7) (8) (9) (10)
 [] - [] - [] - [] - [] - [] - [] - [] - [] / []
Order example 902305/83 - 386 - 1001 - 1 - 4,5 - 100 - 2 - 03 - 4000 / 000

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13031, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Stock versions

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	Sales No.
902305/22	- 380	- 1003	- 1	- 4	- 100	- 3	- 11	- 4000	/ 000	90/00338150
902305/22	- 380	- 1001	- 1	- 4	- 100	- 2	- 11	- 4000	/ 317	90/00338153
902305/23	- 380	- 1003	- 1	- 4	- 100	- 3	- 11	- 4000	/ 000	90/00085418
902305/23	- 380	- 1003	- 1	- 4	- 100	- 2	- 11	- 4000	/ 000	90/00085420
902305/43	- 380	- 1003	- 1	- 4	- 100	- 3	- 11	- 4000	/ 000	90/00083365
902305/43	- 380	- 1001	- 1	- 4	- 100	- 3	- 11	- 4000	/ 000	90/00083366
902305/43	- 380	- 1003	- 1	- 4	- 100	- 2	- 11	- 4000	/ 000	90/00083791
902305/43	- 380	- 2001	- 1	- 4	- 100	- 2	- 11	- 4000	/ 000	90/00089569
902305/43	- 380	- 1001	- 1	- 4	- 100	- 2	- 11	- 4000	/ 000	90/00083792
902305/63	- 386	- 1001	- 1	- 4	- 100	- 3	- 11	- 4000	/ 000	90/00325270
902305/63	- 386	- 1001	- 1	- 4	- 100	- 2	- 11	- 4000	/ 000	90/00333089